

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 November 2001 (08.11.2001)


PCT

(10) International Publication Number  
**WO 01/84847 A1**

- (51) International Patent Classification<sup>7</sup>: **H04N 7/26** Holstlaan 6, NL-5656 AA Eindhoven (NL). PES-  
QUET-POPESCU, Beatrice; Prof. Holstlaan 6, NL-5656  
AA Eindhoven (NL).
- (21) International Application Number: PCT/EP01/04361
- (22) International Filing Date: 17 April 2001 (17.04.2001) (74) Agent: LANDOUSY, Christian; Internationaal Oc-  
trooibureau B.V., Prof. Holstlaan 6, NL-5656 AA  
Eindhoven (NL).
- (25) Filing Language: English
- (26) Publication Language: English (81) Designated States (national): CN, JP, KR.
- (30) Priority Data: 00401216.7 3 May 2000 (03.05.2000) EP (84) Designated States (regional): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE, TR).
- (71) Applicant: KONINKLIJKE PHILIPS ELECTRON-  
ICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA  
Eindhoven (NL). Published:  
— with international search report  
— before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments
- (72) Inventors: FELTS, Boris; Prof. Holstlaan 6, NL-5656  
AA Eindhoven (NL). BENETIERE, Marion; Prof.

[Continued on next page]

(54) Title: ENCODING METHOD FOR THE COMPRESSION OF A VIDEO SEQUENCE

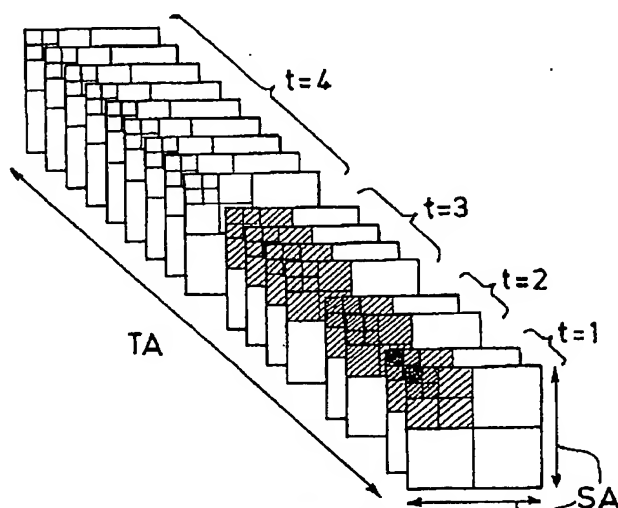


(57) Abstract: The invention relates to an encoding method for the compression of a video sequence by means of a tridimensional wavelet transform. This method is based on a hierarchical subband encoding process leading to transform coefficients constituting a hierarchical pyramid. A spatio-temporal orientation tree, in which the roots are formed with the pixels of the approximation subband and the offspring of each of these pixels is formed with the pixels of the higher subbands, defines the spatio-temporal relationship inside said pyramid. According to the invention, the initial subband structure of the wavelet transform is preserved, in the encoding process, by scanning the subbands in an order that respects the parent-offspring dependencies. Moreover, flags " off/on " are added to each tree coefficient view of a progressive transmission, at least one of them describing the state of a set of pixels and at least another one describing the state of a single pixel.



WO 01/84847 A1

R  
FC  
SC  
TC



512

**WO 01/84847 A1**



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## Encoding method for the compression of a video sequence

## FIELD OF THE INVENTION

The present invention relates to an encoding method for the compression of a video sequence divided in groups of frames decomposed by means of a three-dimensional (3D) wavelet transform leading to a given number of successive resolution levels corresponding to the decomposition levels of said transform, said method being based on a hierarchical subband encoding process leading from the original set of picture elements (pixels) of each group of frames to transform coefficients constituting a hierarchical pyramid, and a spatio-temporal orientation tree - in which the roots are formed with the pixels of the approximation subband resulting from the 3D wavelet transform and the offspring of each of these pixels is formed with the pixels of the higher subbands corresponding to the image volume defined by these root pixels - defining the spatio-temporal relationship inside said hierarchical pyramid.

## BACKGROUND OF THE INVENTION

The expansion of multimedia applications is now making the scalability one of the most important functionalities of video compression schemes. Scalability allows delivering multiple levels of quality or spatial resolutions/frame rates in an embedded bitstream towards receivers with different requirements and encoding capabilities. Current standards like MPEG-4 have implemented scalability in a predictive DCT-based framework through additional high-cost layers. More efficient solutions based on a three-dimensional wavelet decomposition followed by a hierarchical encoding of the spatio-temporal trees like the Set Partitioning In Hierarchical Trees algorithm (SPIHT) have been recently proposed as an extension of still image coding techniques (the original SPIHT algorithm is described for instance in "A new, fast, and efficient image codec based on set partitioning in hierarchical trees", by A. Said and W.A. Pearlman, IEEE Transactions on Circuits and Systems for Video Technology, vol.6, n°3, June 1996, pp.243-250, and the extension of this algorithm to the 3D case is described for instance in "An embedded wavelet video coder using three-dimensional set partitioning in hierarchical trees (SPIHT)", B.J. Kim and W.A. Pearlman, Proceedings of Data Compression Conference, March 25-27, 1997, Snowbird, Utah, USA, pp.251-260). The

3D wavelet decomposition provides a natural spatial resolution and frame rate scalability, while the in-depth scanning of the obtained coefficients in the hierarchical trees and the bitplane encoding lead to the desired quality scalability with a high compression ratio.

The SPIHT algorithm is based on a key concept : a partial sorting of the  
5 coefficients according to a decreasing magnitude, and the prediction of the absence of significant information across scales of the wavelet decomposition by exploiting self-similarity inherent in natural images. This means that if a coefficient is insignificant at the lowest scale of the wavelet decomposition, the coefficients corresponding to the same area at the other scales have a high probability to be insignificant too. Basically, the SPIHT is an  
10 iterative algorithm that consists in comparing a set of pixels corresponding to the same image area at different resolutions with a value called "level of significance" from the maximal significance level found in the spatio-temporal decomposition tree down to 0. For a given level, or bitplane, two passes are carried out : the sorting pass, which looks for zero-trees or sub-trees and sorts insignificant and significant coefficients, and the refinement pass, which  
15 sends the precision bits of the significant coefficients. The SPIHT algorithm examines the wavelet coefficients from the highest level of the decomposition to the lowest one. This corresponds to first considering the coefficients corresponding to important details located in the smallest scale subbands, with increasing resolution, then examining the smallest coefficients, which correspond to fine details. This justifies the "hierarchical" designation of  
20 the algorithm : the bits are sent by decreasing importance of the details they represent, and a progressive bitstream is thus formed.

A tree structure, called spatial (or spatio-temporal in the 3D case) orientation tree, defines the spatial (or spatio-temporal) relationship inside the hierarchical pyramid of wavelet coefficients. The roots of the trees are formed with the pixels of the approximation  
25 subband at the lowest resolution ("root" subband), while the pixels of the higher subbands corresponding to the image area (to the image volume, in the 3D case) defined by the root pixel form the offspring of this pixel. In the 3D version of the SPIHT algorithm, each pixel of any subband but the leaves has 8 offspring pixels, and each pixel has only one parent. There is one exception at this rule : in the root case, one pixel out of 8 has no offspring. The  
30 following notations describe the parent-offspring relationship, an illustration of these dependencies being given in Fig.1 (three-dimensional case) where the notations are the following : TF = temporal frame, TAS = temporal approximation subband, CFTS = coefficients in the spatio-temporal approximation subbands (or root coefficients), TDS.LRL

= temporal detail subband at the last resolution level of the decomposition, and TDS.HR = temporal detail subband at higher resolution :

$O(x,y,z)$  : set of coordinates of the direct offspring of the node  $(x,y,z)$  ;

$D(x,y,z)$  : set of coordinates of all descendants of the node  $(x,y,z)$  ;

5  $H(x,y,z)$  : set of coordinates of all spatio-temporal orientation tree roots (nodes in the highest pyramid level : spatio-temporal approximation subband) ;

$L(x,y,z) = D(x,y,z) - O(x,y,z)$ .

The SPIHT algorithm makes use of three lists : the LIS (list of insignificant sets), the LIP (list of insignificant pixels), and the LSP (list of significant pixels). In all these  
10 lists, each entry is identified by a coordinate  $(x,y,z)$ . In the LIP and LIS,  $(x,y,z)$  represents a unique coefficient, while in the LIS it represents a set of coefficients  $D(x,y,z)$  or  $L(x,y,z)$ , which are sub-trees of the spatio-temporal tree. To differentiate between them, the LIS entry is of type A if it represents  $D(x,y,z)$ , and of type B if it represents  $L(x,y,z)$ . During the first pass (sorting pass), all the pixels of the LIP are tested and those that become significant are  
15 moved to the list LSP. Similarly, the sets of the LIS that become significant are removed from the list LIS and split into subsets that are placed at the end of the LIS and will be each examined in turn. The LSP contains the list of significant pixels to be "refined" : the  $n^{\text{th}}$  bit of the coefficient is sent if this one is significant with respect to the level  $n$ .

The SPIHT approach is designed to provide quality scalability associated with  
20 a high compression ratio. However, scalability in temporal or spatial resolutions cannot be obtained with this coding strategy without modifications. To improve the global compression rate of the video coding system, it is usually advised to add an arithmetic encoder to the zero-tree encoding module. In other approaches, the arithmetic coding uses pertinent contexts directly applied to the subbands for lossless image compression. Most of the time, the  
25 hierarchical and arithmetic coding modules are considered separately. To efficiently combine them in a single coding system, some modifications have to be performed on the original SPIHT algorithm.

To make the arithmetic coding efficient, it is very important to capture all the information that may have some influence on the current pixel and particularly the  
30 information related to neighbouring pixels. This information is represented by its context. The in-depth search performed when scanning for zero-trees does not exploit the redundancy inside subbands and makes harder the determination of a relevant context for the arithmetic coding. The manipulation of the lists LIS, LIP, LSP conducted by a set of logical conditions makes the order of pixel scanning hardly predictable. The pixels belonging to the same 3D

offspring tree but coming from different spatio-temporal subbands are encoded and put one after the other in the lists, which has for effect to mix the pixels of foreign subbands. Thus, the geographic interdependencies between pixels of the same subband are lost. Moreover, since the spatio-temporal subbands result from temporal or spatial filtering, the frames are  
5 filtered along privileged axes that give the orientation of the details. This orientation dependency is also lost when the SPIHT algorithm is applied, because the scanning does not respect the geographic order.

Furthermore, the bits resulting from the examination of the lists LIS, LIP, LSP and the signs of the coefficients have quite different statistical properties. The relevant  
10 contexts for one list can be totally different from another. For example, as the LIP represents the set of insignificant pixels, it is reasonable to suppose that if a pixel is surrounded by insignificant pixels, it has great chance to be insignificant too, but this supposition seems bolder for the LSP : it cannot be necessarily deduced that the refinement bit of an examined pixel is one (resp. zero) if the refinement bits of its neighbours are ones (resp. zeros) at a  
15 certain level of significance.

Faced with the difficulties to add an entropy coding stage to the SPIHT algorithm, the documents that relate such an implementation are quite elusive, or even skeptical about the efficiency of the proposed solutions. Most of the time, the hierarchical coding methods and the context-based lossless image compression methods are confronted in  
20 the case of still pictures. In the case of a video sequence, the SPIHT encoding strategy is very efficient to provide a fully quality progressive bitstream with a high compression rate, but the hierarchical structure used in said strategy however does neither facilitate the insertion of a context-based adaptive arithmetic coding nor the functionality of spatial or temporal resolution scalability, which is strongly required by emerging multimedia applications.

## 25 SUMMARY OF THE INVENTION

It is therefore an object of the invention to propose a new strategy for encoding the spatio-temporal wavelet coefficients, inspired from the 3D-SPIHT, but which allows a better context selection while allowing to obtain a spatial or temporal resolution  
30 scalability in the coding scheme.

To this end, the invention relates to an encoding method such as defined in the introductive part of the description and which is moreover characterized in that :

(A) the initial subband structure of the 3D wavelet transform is preserved by scanning the subbands one after the other in an order that respects the parent-offspring dependencies formed in said spatio-temporal tree ;

5 (B) flags " off / on " are added to each coefficient of the spatio-temporal tree in view of a progressive transmission of the most significant bits of the coefficients, these flags being such that at least one of them describes the state of a set of pixels and at least another one describes the state of a single pixel.

Although the use of lists LIS, LIP and LSP in the original SPIHT algorithm facilitates the classification task, it is an obstacle to a geographic organization of the  
10 coefficients. By using the present technique, the initial subband structure of the 3D wavelet transform is preserved, and a flag added to each coefficient indicates to which list LIS, LIP or LSP this coefficient belongs. Thus, the scanning of the lists is replaced by a subband scanning and a flag interpretation : the hierarchical and logical organization of the SPIHT is preserved, and in the same time moving a coefficient from a list to another is "virtually" done  
15 by changing its flag. The interest of this "virtual moving" is that the order of reading is not dependent of the changes performed by the logic of the SPIHT algorithm, which is particularly interesting for the refinement pass, since the refinement bits constitute the greatest part of the bitstream.

## 20 BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described, with reference to the accompanying drawings in which :

- Fig.1 gives examples of parent-offspring dependencies in the 3D case, in the spatio-temporal orientation tree ;
- 25 - Fig.2 illustrates the hierarchy of the subbands in said spatio-temporal tree ;
- Fig.3 shows a spatially-driven scanning of the spatio-temporal tree ;
- Fig.4 depicts a bitstream organization made possible by the ordered 3D SPIHT ;
- Fig.5 shows a temporally-driven scanning of the spatio-temporal tree, and
- 30 Fig.6 depicts the structure of the bitstream obtained with said scanning ;
- Fig.7 illustrates a combination of SNR, spatial and temporal scalabilities using the spatially-driven scanning strategy ;
- Fig.8 shows the hierarchical organization of the bitstream without resolution flags.

## DETAILED DESCRIPTION OF THE INVENTION

- In the considered method, the whole spatio-temporal tree is fully scanned for each new bitplane. At the end of the first bitplane, all the offspring dependencies of the 3D volume have been evaluated. This first scanning is therefore quite critical and must absolutely respect the calculation order of the offspring dependencies described in Fig.2, where the notations are the following : SA = spatial (s) axes, TA = temporal (t) axis, R = roots, FC = first children, SC = second children, and TC = third children. According to the invention, the proposed algorithm scans the subbands one after the other in an order that respects the parent-offspring relationships. At least two different flags, and preferably four, are added to the coefficients of the spatio-temporal tree :
- A) at least one, and preferably two of them describe the state of a set (trees or subtrees) :
    - DIRECT\_SET\_INSIG (or FS1) if  $D(x,y,z)$  is still insignificant ;
    - UNDIRECT\_SET\_INSIG (or FS2) if  $L(x,y,z)$  is still insignificant.
  - B) at least another one, and preferably the two other ones describe the state of a single pixel:
    - SIG (or FP3) if the current pixel is significant ;
    - INSIG (or FP4) if it is not significant, or if its significance is to be analyzed (put by default to the pixels that are not included in a zero-tree).

The main steps of the algorithm implemented in the present method are :

1. Initialization :
  - Put flag FP4 to all the coefficients of the lowest spatio-temporal subband ;
  - Put flag FS1 to 7 over 8 coefficients of the lowest spatio-temporal subband.
2. Calculate and output MSL (the maximum significance level found in the spatio-temporal decomposition tree).
3. From  $n = \text{MSL}$  down to 0, do a full exploration of the spatio-temporal tree (two main approaches are possible, as described in the following paragraph : spatially-driven resolution scalability, and temporally-driven resolution scalability), with, for each coefficient  $(x,y,z)$  of the spatio-temporal tree, the following actions :
  - a) set significance :
    - 1) if flag FS1 is "on", then output =  $S_n(D(x,y,z))$ .
    - if  $S_n(D(x,y,z)) = 1$ , then :
      - for each  $(x',y',z') \in O(x,y,z)$ , put flag FP4 ;
      - remove flag FS1 from  $(x,y,z)$  ;
      - if  $L(i,j) \neq \emptyset$ , then put flag FS2.



2) if flag FS2 is "on", then output =  $S_n(L(x,y,z))$ .

if  $S_n(L(x,y,z)) = 1$ , then :

- for each  $(x',y',z') \in O(x,y,z)$ , put flag FS1 ;

- remove flag FS2 from  $(x,y,z)$ .

5           b) pixel significance :

1) if flag FP3 is on, then output = the  $n^{\text{th}}$  bit of  $(x,y,z)$ .

2) if flag FP4 is on, then output =  $S_n(x,y,z)$ .

if  $S_n(x,y,z) = 1$ , then :

put flag FP3 on ;

10           output sign  $(x,y,z)$  ;

remove flag FP4.

The frames are filtered along privileged axes (spatial or temporal) that give the orientations of the details. These orientations can be better taken into account by scanning the subband along the same directions. Using this algorithm, there are then two main ways of exploring the spatio-temporal volume of coefficients depending on the chosen privileged orientation chosen, which may be either the spatial or the temporal axis. Consequently, two types of "multi-scalable" bitstreams may be obtained, one leaded by the spatial resolution, the second by the temporal resolution :

(A) spatially-driven resolution scalability :

20           For each bitplane, the tree scanning is spatially oriented, since in this scheme the spatial resolutions are fully explored one after the other as shown in Fig.3. Inside each spatial scale, all the temporal resolutions are successively scanned. In other words, the temporal frequency is higher than the spatial one. In order to have the possibility to skip some part of the bitstream, it is necessary to introduce resolution flags in the bitstream. The scanning strategy leads to a video bitstream organized as indicated in Fig.4, where the lines s and t correspond respectively to spatial and temporal decomposition levels (SDL and TDL), the black flags are flags separating two bitplanes, and the grey flags are flags separating two spatial decomposition levels.

(B) temporally-driven resolution scalability :

30           For each bitplane, the tree scanning is temporally oriented, since in this scheme the temporal resolutions are fully explored one after the other, as shown in Fig.5. Inside each temporal scale, all the spatial resolutions are successively scanned and therefore all the spatial frequencies are available. This scanning strategy leads to a video bitstream organized as indicated in Fig.6, to be compared with Fig.4 (the grey flags are now flags

separating two temporal decomposition levels). In both cases, the three types of scalability (temporal, spatial resolution, SNR) are obtained :

- SNR scalability is still available since the spatio-temporal scanning is inserted in a bitplane iterative loop ;

- 5        - temporal and spatial scalability are provided respectively with  $t_{\max}$  possible frame rates and  $s_{\max}$  possible display sizes ( $t = 1$  to 4 and  $s = 1$  to 4 in the described examples), with  $t = 1$  corresponding to the minimum frame rate $_{\min}$ , and  $s = 1$  corresponding to the minimum display size.

An example of selective decoding is illustrated in Fig.7.

- 10                The advantages of the implementation of the method according to the invention are the following :

- (A) improvement of contexts : thanks to the fixed subband scanning and the recognition of the flags, it is possible to reestablish a coherent geographic context for each model (indeed, the SPIHT algorithm aims at reducing the redundancy between subbands of different scales, but it does not really take into account the geographic redundancy, unlike the context-based coding approaches), which is particularly interesting for the coding of the significant pixels and their refinement bits (for the significant pixels, thanks to the algorithm proposed, the same efficiency as with the SPIHT algorithm can be reached, and the rules of construction of the context are quite simple). This method better exploits the neighbouring influence on the current pixel than those which combine classical SPIHT algorithm and entropy coding, and leads to a "natural" context, directly issued from the transformed image, in conformity with the bitplane approach, and not from the bits resulting from the original SPIHT algorithm in the refinement passes. Said method should improve the compression rate, as the context is really related to the bit being encoded, but, as it scans all the subbands entirely, the computation time for the first levels is greater than with the former method.
- 15
- 20
- 25

(B) trade-off between multi-scalability and bitstream overload : the possibility to reconstruct video sequences with the desired frame rate and display sizes by extracting the corresponding fragments of the bitstream is an attractive concept, but it is obtained at the expense of coding efficiency for two main reasons :

- 30        (a) the bitstream fragments related to a particular spatial or temporal resolution need to be separated by a flag to make jumps possible. With the two scalability schemes described above, on the examples given, at least four separators are needed per bitplane, and up to 12 bitplanes are currently used to encode the wavelet coefficients.

(b) the context calculation of the adaptive arithmetic coding module must be reinitialized at the beginning of each new bitplane to ensure that any bitstream fragment will be processed at the decoder side in exactly the same conditions as at the encoder side.

Therefore the multiplication of separators will unavoidably reduce the length of the consecutive bit sequences encoded by the arithmetic coding module and makes harder the probability estimation. However, as the subbands can be considered as non or partially stationary sources, this apparent drawback could be a quality.

A trade-off must be found between full resolution scalability and arithmetic coding efficiency. To this end, an intermediate solution, which provides four levels of spatial and temporal scalabilities, is proposed. The minimal frame rate  $rate_{min}$  is always associated with the minimal display size ( $S^x_{min}, S^y_{min}$ ), to constitute the first resolution level. As well  $2 * rate_{min}$  is combined with the display size ( $2 * S^x_{min}, 2 * S^y_{min}$ ) etc. Fig.8 illustrates this when there are four resolution levels in the decomposition of the group of frames (GOF). All the combinations that were previously possible (16 possibilities with 4 spatial levels and four temporal levels) are now restricted to four.

## CLAIMS:

1. An encoding method for the compression of a video sequence divided in groups of frames decomposed by means of a three-dimensional (3D) wavelet transform leading to a given number of successive resolution levels corresponding to the decomposition levels of said transform, said method being based on a hierarchical subband encoding process  
5 leading from the original set of picture elements (pixels) of each group of frames to transform coefficients constituting a hierarchical pyramid, and a spatio-temporal orientation tree - in which the roots are formed with the pixels of the approximation subband resulting from the 3D wavelet transform and the offspring of each of these pixels is formed with the pixels of the higher subbands corresponding to the image volume defined by these root pixels -  
10 defining the spatio-temporal relationship inside said hierarchical pyramid, said encoding method being further characterized in that :  
(A) the initial subband structure of the 3D wavelet transform is preserved by scanning the subbands one after the other in an order that respects the parent-offspring dependencies formed in said spatio-temporal tree ;  
15 (B) flags " off / on " are added to each coefficient of the spatio-temporal tree in view of a progressive transmission of the most significant bits of the coefficients, these flags being such that at least one of them describes the state of a set of pixels and at least another one describes the state of a single pixel.
- 20 2. An encoding method according to claim 1, characterized in that, for each bitplane, the tree scanning is spatially oriented, all the temporal resolutions being successively scanned inside each spatial scale and resolution flags being introduced between any two spatial scales.
- 25 3. An encoding method according to claim 1, characterized in that, for each bitplane, the tree scanning is temporally oriented, all the spatial resolutions being successively scanned inside each temporal scale and resolution flags being introduced between any two temporal scales.

4. An encoding method according to claim 1, characterized in that, for each bitplane, an intermediate tree scanning is performed, all the temporal and spatial resolutions of the same scale being jointly scanned and resolution flags being introduced between any two spatial/temporal scales.

5. An encoding method according to anyone of claims 2 to 4, characterized in that two flags describe the state of a set of pixels and are, for each coefficient  $(x,y,z)$  of said spatio-temporal tree :

- FS1 if  $D(x,y,z)$  is still insignificant ;

10 - FS2 if  $L(x,y,z)$  is still insignificant ;

where  $D(x,y,z)$  is the set of coordinates of all the descendants of the node  $(x,y,z)$  and  $L(x,y,z) = D(x,y,z) - O(x,y,z)$ , with  $O(x,y,z)$  being the set of coordinates of the direct offspring of the node  $(x,y,z)$ , and two flags describe the state of a single pixel and are :

15 - FP3 if the current pixel is significant ;

- FP4 if it is not significant or if its significance is to be analyzed.

6. An encoding method according to claim 5, characterized in that the exploration of the spatio-temporal tree, implemented in said scanning order, includes, after an initialization step where the flag FP4 is put to all the coefficients of the lowest spatio-temporal subband and the flag FS1 to 7 over 8 coefficients of said lowest spatio-temporal subband, and the maximum significance level MSL is calculated, the following steps, carried out from the bitplane  $n = \text{MSL}$  down to the bitplane  $n = 0$  and from the lowest subband resolution down to the highest one :

25 (a) a first set of tests related to the set significance ;

(1) if the flag FS1 is "on", then output  $S_n(D(x,y,z))$  :

- if  $S_n(D(x,y,z)) = 1$ , then :

- for each  $(x',y',z')$  in  $O(x,y,z)$ , put flag FP4 ;

- remove flag FS1 from  $(x,y,z)$  ;

30 - if  $L(x,y,z)$  not empty, then put flag FS2.

(2) if flag FS2 is "on", then output  $S_n(L(x,y,z))$  :

- if  $S_n(L(x,y,z)) = 1$ , then :

- for each  $(x',y',z')$  in  $O(x,y,z)$ , put flag FS1 ;

- remove flag FS2 from  $(x,y,z)$ .

(b) a second set of tests related to the pixel significance :

(1) if the flag FP3 is "on", then output = the n-th bit of (x,y,z) ;

(2) if the flag FP4 is "on", then output  $S_n(x,y,z)$  :

- if  $S_n(x,y,z) = 1$ , then :

5

- put flag FP3 "on" ;

- output sign (x,y,z) ;

- and remove flag FP4.

7. An encoding method according to anyone of claims 1 to 6, characterized in  
10 that it also comprises a partial decoding step of the bitstream between two resolution flags,  
leading to a lower resolution/frame rate reconstructed video sequence.

8. An encoding method according to claim 7, characterized in that the context  
used for the encoding of each bit related to the set significance in an arithmetic coding  
15 module is built using the bits of the same bitplane of the last scanned neighbouring wavelet  
coefficients in the same spatio-temporal subband, these bits being the bits output during the  
first set of tests related to the set significance.

9. An encoding method according to claim 7, characterized in that the context  
20 used for the encoding of each bit related to the pixel significance in an arithmetic coding  
module is built using the bits of the same bitplane of the last scanned neighbouring wavelet  
coefficients in the same spatio-temporal subband, these bits being 1 if the neighbouring  
coefficients are marked by an FP3 flag and 0 if not.

1/6

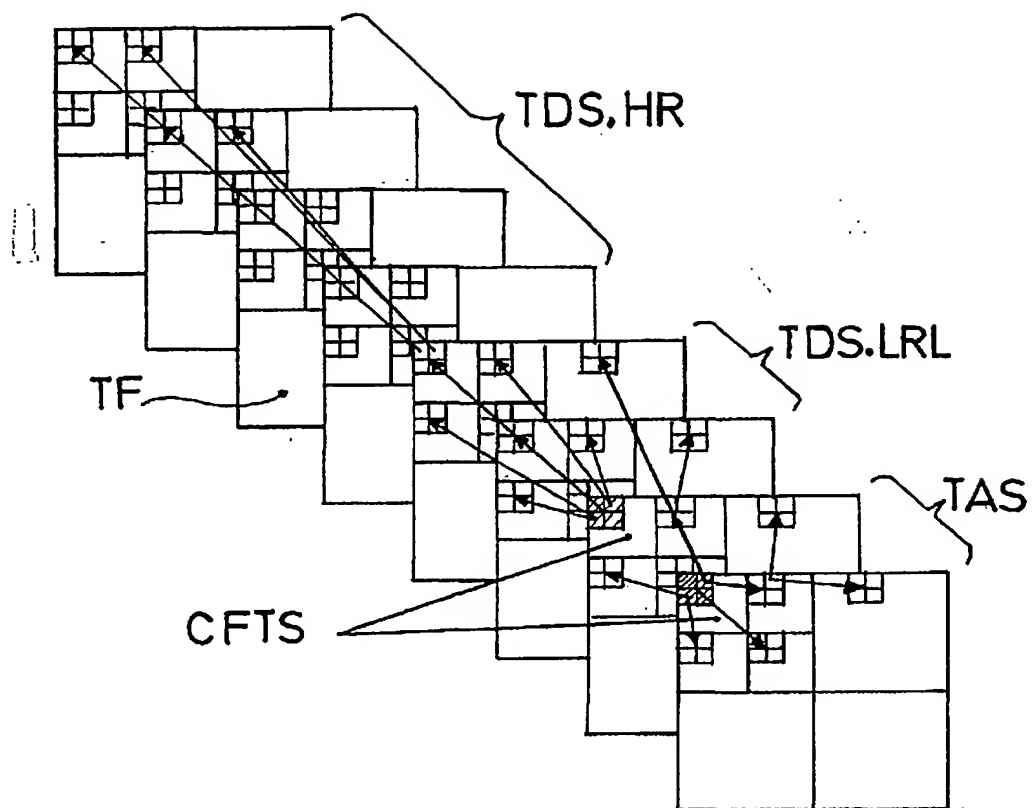


FIG.1

2/6

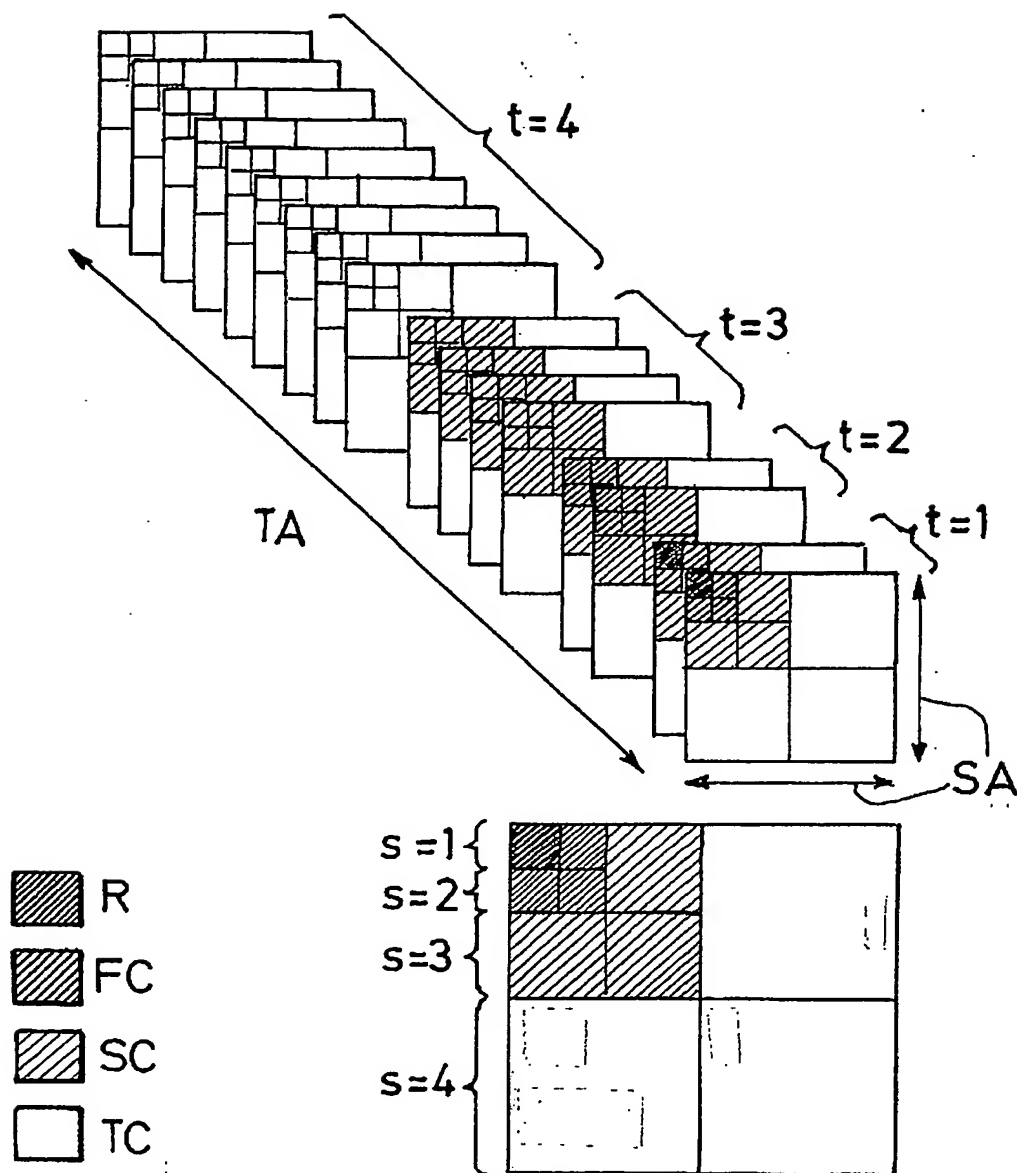


FIG.2



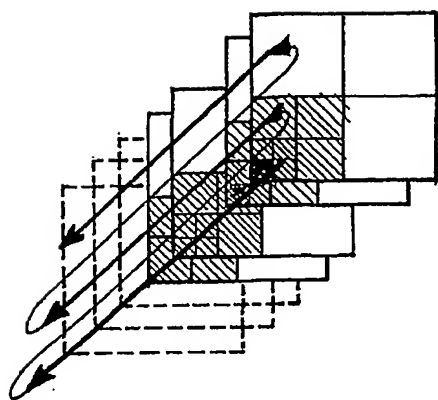


FIG. 3

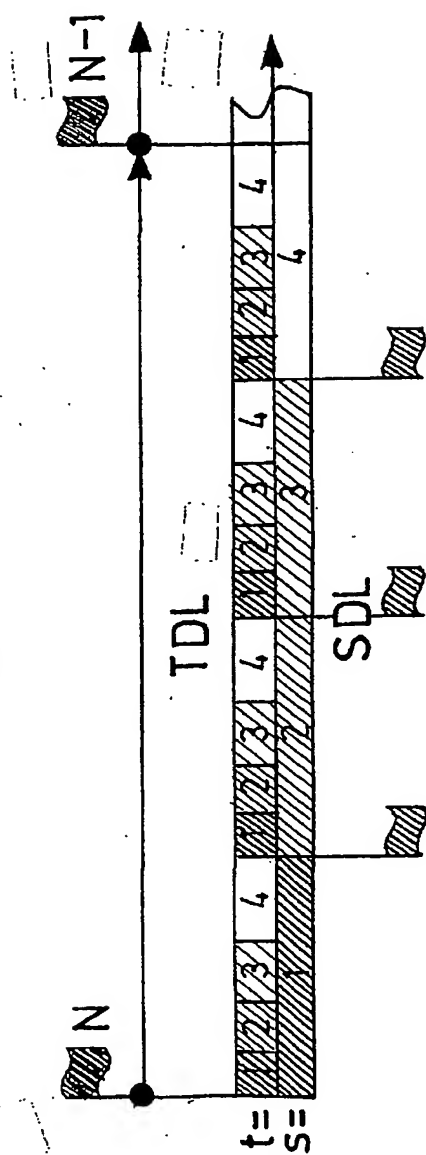


FIG. 4

4/6

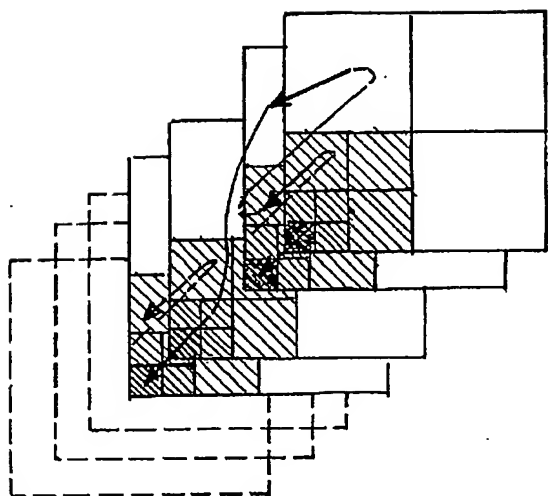


FIG. 5

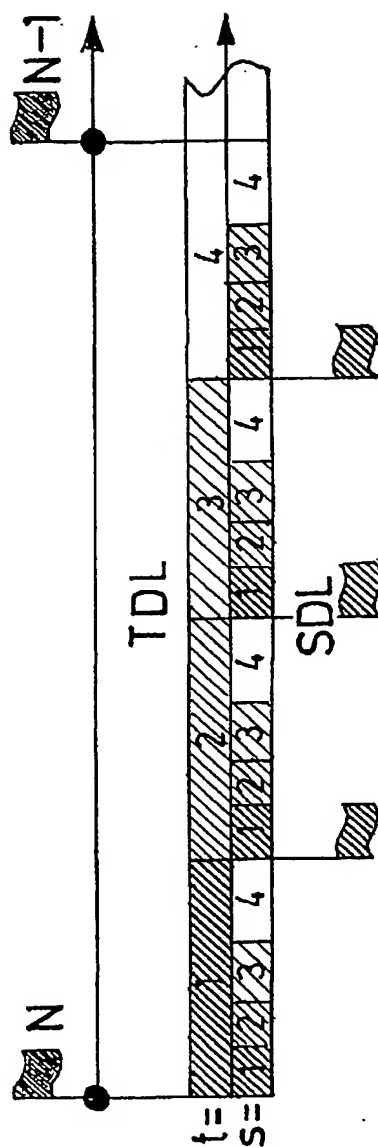


FIG. 6

5/6

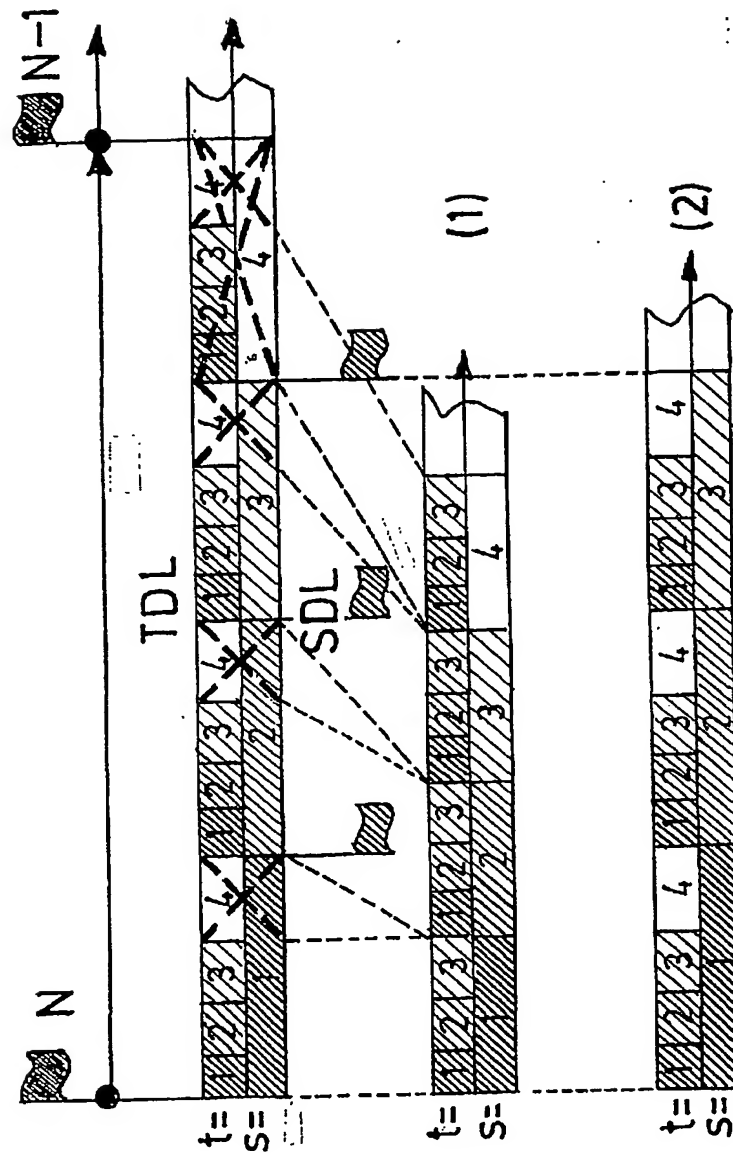


FIG.7

6/6

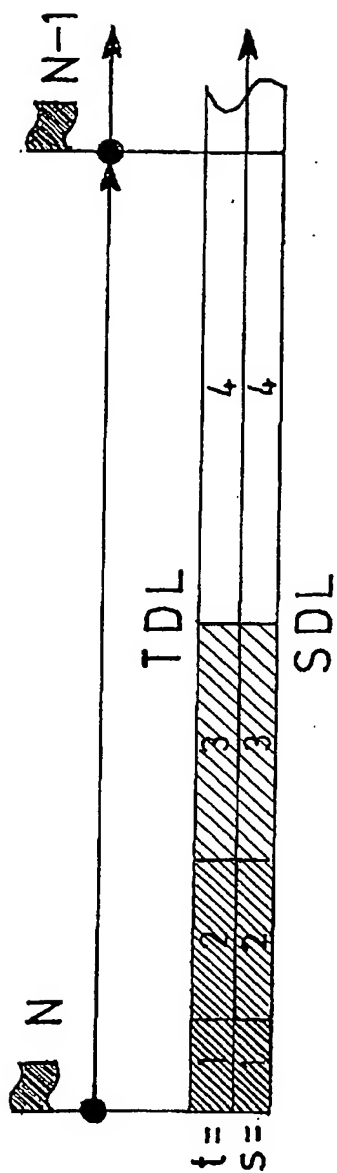


FIG.8

# INTERNATIONAL SEARCH REPORT

Intel nual Application No  
PCT/EP 01/04361

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, COMPENDEX

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	LIN W-K ET AL: "3D LISTLESS ZEROTREE CODING FOR LOW BIT RATE VIDEO" PROCEEDINGS 1999 INTERNATIONAL CONFERENCE ON IMAGE PROCESSING. ICIP'99. KOBE, JAPAN, OCT. 24 - 28, 1999, INTERNATIONAL CONFERENCE ON IMAGE PROCESSING, LOS ALAMITOS, CA: IEEE, US, vol. 3 OF 4, 24 October 1999 (1999-10-24), pages 762-766, XP000983075 ISBN: 0-7803-5468-0 page 762, paragraph 2 page 763, paragraph 3	1
Y		2-4, 7, 8
A		5, 6, 9



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the International filing date but later than the priority date claimed

- \*T\* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

23 August 2001

Date of mailing of the international search report

31/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Lombardi, G

## INTERNATIONAL SEARCH REPORT

Int'l Application No  
PCT/EP 01/04361

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	THAM J Y ET AL: "HIGHLY SCALABLE WAVELET-BASED VIDEO CODEC FOR VERY LOW BIT-RATE ENVIRONMENT" IEEE JOURNAL ON SELECTED AREAS IN COMMUNICATIONS, IEEE INC. NEW YORK, US, vol. 16, no. 1, 1998, pages 12-27, XP000734808 ISSN: 0733-8716 page 17, paragraph IV.A.2 page 18, paragraph IV.B.2 page 19, paragraph IV.B.3 figures 6-10	2-4
A	----	1,5,6,9
Y	XIONG Z ET AL: "MULTIRESOLUTION ENCODING AND DECODING IN EMBEDDED IMAGE AND VIDEO CODERS" PROCEEDINGS OF THE 1998 IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH AND SIGNAL PROCESSING. ICASSP '98. SEATTLE, WA, MAY 12 - 15, 1998, IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH AND SIGNAL PROCESSING, NEW YORK, NY: IEEE, US, vol. 6 CONF. 23, 12 May 1998 (1998-05-12), pages 3709-3712, XP000951264 ISBN: 0-7803-4429-4 page 3709, paragraph 2 page 3710, paragraph 3 figures 1,2	7,8
A	----	1-6,9
A	LIANG J ET AL: "TOOLS FOR ROBUST IMAGE AND VIDEO CODING IN JPEG 2000 AND MPEG4 STANDARDS" PROCEEDINGS OF THE SPIE, SPIE, BELLINGHAM, VA, US, vol. 3653, January 1999 (1999-01), pages 40-51, XP000933619 page 41, paragraph 3 -page 42, paragraph 7	1-4
A	JARVI A ET AL: "Variable quality image compression system based on SPIHT" SIGNAL PROCESSING. IMAGE COMMUNICATION, ELSEVIER SCIENCE PUBLISHERS, AMSTERDAM, NL, vol. 14, no. 9, July 1999 (1999-07), pages 683-696, XP004170651 ISSN: 0923-5965 page 687, paragraph 2.3	1-5
	----	
	-/--	

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 01/04361

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>KIM B-J ET AL: "LOW-DELAY EMBEDDED 3-D WAVELET COLOR VIDEO CODING WITH SPIHT" PROCEEDINGS OF THE SPIE, SPIE, BELLINGHAM, VA, US, vol. 3309, 1997, pages 955-964, XP000983097 page 956, paragraph 2 page 958, paragraph 3 -----</p>	1-9